


Material number	0 601 076 900
EAN	3165140803243
4 x 1.5 V LR6 battery (AA)	✓
Protective Bag	✓



Technical data

Technical data

Length	60 cm
Measurement range	0° – 360° (4 x 90°)
Electronics measurement accuracy 0°/90°	± 0.05°
Electronics measuring accuracy at 1– 89°	± 0.1°
Working range (laser)	30 m
Power supply, inclination measurement	1 x 9 V-6LR61 + 2 x 1.5 V LR03
Weight, approx.	0.91 kg
Laser type	650 nm, < 1 mW
Laser range	30 m
Laser class	2
Levelling accuracy of laser	± 0.5 mm/m
Units of measurement	°, %, mm/m
Tripod thread	1/4"

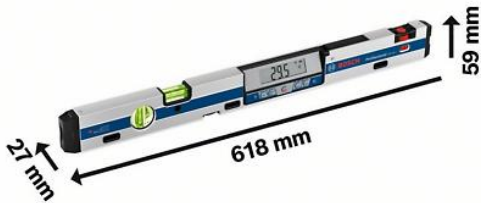

Sales information

Positioning

- Laser-accurate incline transfer over longer distances

User benefit

- Integrated point laser for incline measurement up to a distance of 30 m
- Strong magnets and two straps for securely fastening the instrument to workpieces
- Incline mechanism for fine adjustment on uneven surfaces

